QUELL

1kg Home/Garage Fire Extinguisher (1A:10B:E)



OVERVIEW

Quell's 1kg fire extinguisher is suitable for a range of solutions:

- Home
- Garages
- Automotive
- Caravans
- Workshops

Each Quell branded fire extinguisher is Australian Standard certified and comes with a 5 year warranty.

Shopping for a fire extinguisher has never been easier with Quell's easy application-based packaging, giving consumers peace of mind that they are choosing the right product.

FEATURES & BENEFITS

- Australian Standard certified to AS1841.5
- Mild steel polyester powder coated handle and trigger
- Mild steel polyester powder coated cylinder
- ABE (mono-ammonium phosphate) dry chemical powder.
- · Rated for use on Class A, Class B and Class E fires.
- Ready for use pressure indicator
- Forged brass valve
- Light duty plastic bracket for use in light vehicles including vans and 4-wheel drives

TECHNICAL SPECIFICATIONS


Model Number	Q127415		
Туре	DCP (Stored pressure)		
Capacity	1.0kg (Tol: ±5%)		
Contents	ABE40 Powder		
Rating	1A:10B:E		
Test Pressure	2 MPa		
Operating Pressure	1000 kPa		
Nominal Mass	1.70 kg		
Discharge Time	8 - 11 s		
Nozzle Orifice	3.5 mm		
Service Temperature	-5°C to 65°C		
APN Number	9315546618925		
TUN Outer	29315546618929		

NOTE: Nominal mass and discharge times listed are approximate. Slight variations may occur.

ORDERING INFORMATION

Q127415	Quell 1Kg Extinguisher
	Home/Garage (1A:10B:E)

PRODUCT DIMENSIONS

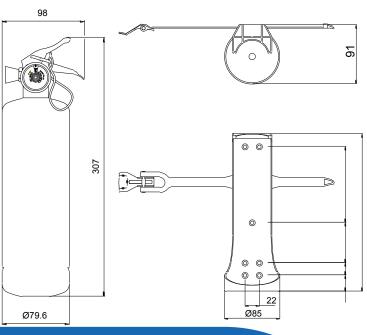

Contact

For further information on the full range of Quell® products, visit our website www.quell.com.au

Kidde Australia Pty Ltd ABN 68 006 252 428 Building F, Unit 1B, 3-29 Birnie Avenue Lidcombe NSW 2141

COMPATIBILITY CHART

	Class A	Class B	Class E
Which Fire Extinguisher do I use for which fire?	Combustible materials e.g. Wood, Paper, Fabric	Flammable liquids e.g. Petrol, Paint or Turpentine	Electrical equipment e.g. Appliances, Computers, Phones
1 kg 1A:10B:E	✓	✓	✓
1 kg 1A:20B:E	✓	✓	✓
1.5 kg 2A:30B:E	✓	✓	✓
2.5 kg 3A:40B:E	✓	✓	✓
4L 2A	✓		
4.5 kg 6A:60B:E	✓	✓	✓
9.0 kg 6A:80B:E	√	✓	✓

SERVICE REQUIREMENTS

Service in accordance with Australian Standard AS1851.

Additional AS1851 Service Requirements:

- Replace Dry Chemical Powder every five (5) years
- The recommended location for stamping the cylinder pressure test date is on the neck ring of the cylinder, consisting of figures not less than 3 mm in height and shall as a minimum be of the form MM/YY, or MM/YYYY.

Distributed by:		